




## Cortina460

Outdoor Totem for Digital Signage



- ✓ Display 46" FHD with touchscreen function
- ✓ LCD panel with LED backlight, high contrast and brightness
- ✓ Auto brightness adjustment based on ambient conditions
- ✓ Solid structure in painted steel, predisposed for ground fixing
- ✓ Protected from atmospheric agents
- ✓ Designed for continuous outdoor operation 24/7
- ✓ High processing capacity thanks to Intel® Core™ processors

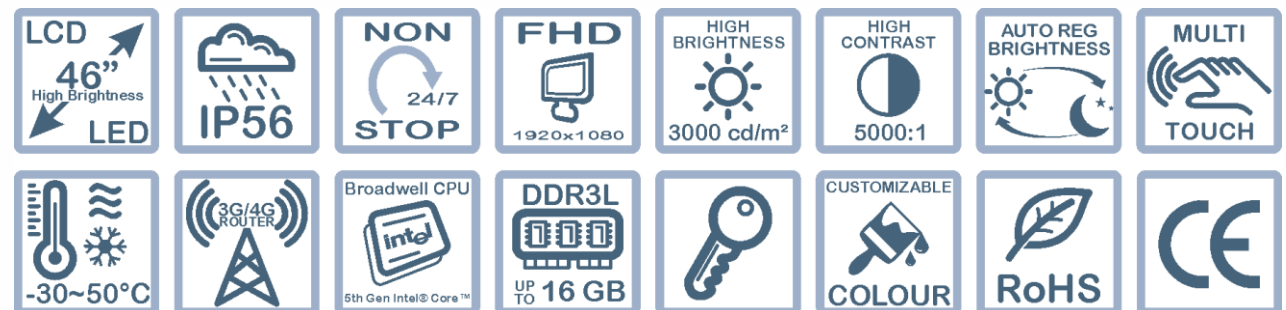

# Cortina460



Outdoor Totem for Digital Signage

<b>Display</b>	<b>Size</b>	46"
	<b>Technology</b>	S-VA
	<b>Aspect ratio</b>	9:16
	<b>Resolution</b>	Full HD 1080 x 1920
	<b>Contrast ratio</b>	5000:1
	<b>Brightness</b>	3000 cd/m <sup>2</sup> Automatically adjusted to ambient light (optional)
	<b>Response time</b>	6ms
	<b>Viewing angle</b>	178° H/V
	<b>Touchscreen</b>	Optional two point infrared touchscreen
	<b>System</b>	<b>Processor</b>
<b>Memory</b>	<b>Max expansion</b>	Up to 16GB
	<b>Type</b>	DDR3L SO-DIMM 1600/1333MHz
<b>Storage</b>	<b>Slot</b>	2
	<b>SSD</b>	M.2 Type B, 22x42 / 22x80 SATA or PCIe
	<b>Internal I/O interface<sup>1</sup></b>	
<b>Internal I/O interface<sup>1</sup></b>	<b>USB</b>	1 x USB 3.0
	<b>LAN</b>	1 x RJ45
	<b>Note</b>	<sup>1</sup> Some I/O interfaces are used by the internal totem peripherals
<b>External I/O interface</b>	<b>Cable hole</b>	The structure is provided with a series of holes at the base, through which you can access the available internal I / O ports.
	<b>Audio</b>	
<b>Audio</b>	<b>Integrated Speaker or Predisposition</b>	N/A
<b>Network</b>	<b>LAN</b>	1 x 10/100/1000 Gigabit Fast Ethernet Controller Optional (see ordering code)
	<b>Router</b>	3G/4G router : – LTE-FDD Band1/3/7/8/20 – UMTS(DC-HSPA+) Band1/3/8 – EDGE/GPRS/GSM 900/1800MHz
	<b>Software</b>	
<b>Software</b>	<b>Supported operating system</b>	Microsoft Windows 10 64-bit Microsoft Windows 7 64-bit Microsoft Windows Embedded Standard 7

<b>Power</b>	<b>Input voltage</b>	AC 240 V~ (+/- 10 %) 60 Hz
	<b>Power consumption</b>	650W Max 230W Medium
<b>Mechanical</b>	<b>L x H x D</b>	802mm x 2106mm x 220mm
	<b>Weight</b>	125KG (estimated for medium configuration)
	<b>Colour</b>	Standard colour : See ordering code. Custom colour : On request.
	<b>Service</b>	Rear doors. Protected by key lock.
<b>Environment</b>	<b>Operating temp.</b>	From -30°C to +50°C
	<b>Non operating temp.</b>	From -20°C to +60°C
	<b>RH</b>	From 10% to 80%
	<b>IP degree</b>	IP56
<b>Product Certification</b>	<b>Reference marks</b>	CE, RoHS
	<b>Direttive</b>	
<b>Company Certification</b>	<b>Reference marks</b>	UNI EN ISO 9001
<b>Datasheet</b>	<b>Doc. Ref.</b>	ZST-4292-00000013-00
<b>Ordering code</b>	<b>CNTOTEM-OUTD-17-02</b>	Totem OUTDOOR "Cortina460", INOX, LCD 46", INTEL i3, Matte gray RAL9006
	<b>CNTOTEM-OUTD-17-02A</b>	Totem OUTDOOR "Cortina460", INOX, LCD 46", INTEL i3, colore:OXIDE 1
<b>Option</b>	<b>KDIC46A-ACC-01</b>	Mechanical foundation base
	<b>EKIT-TOTEM-ACC-0037</b>	Two point infrared touchscreen
	<b>EKIT-TOTEM-ACC-0042</b>	3G/4G router



[www.intercomp.it](http://www.intercomp.it)

Intercomp S.p.A.  
Via della Scienza 27  
37139, Verona, Italia  
Tel +39 045-8378411  
Fax +39 045-8510539









**ISO 9001:2008**

[intercomp@intercomp.it](mailto:intercomp@intercomp.it)

The product may differ from the images shown. All registered names and trademarks are legitimate owners. All specifications and specifications can be changed without prior notice..  
updated 07/07/2017

# Cortina460

Outdoor Totem for Digital Signage

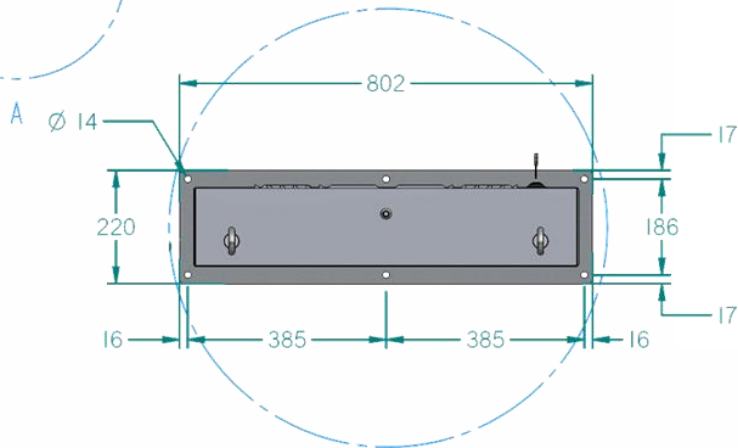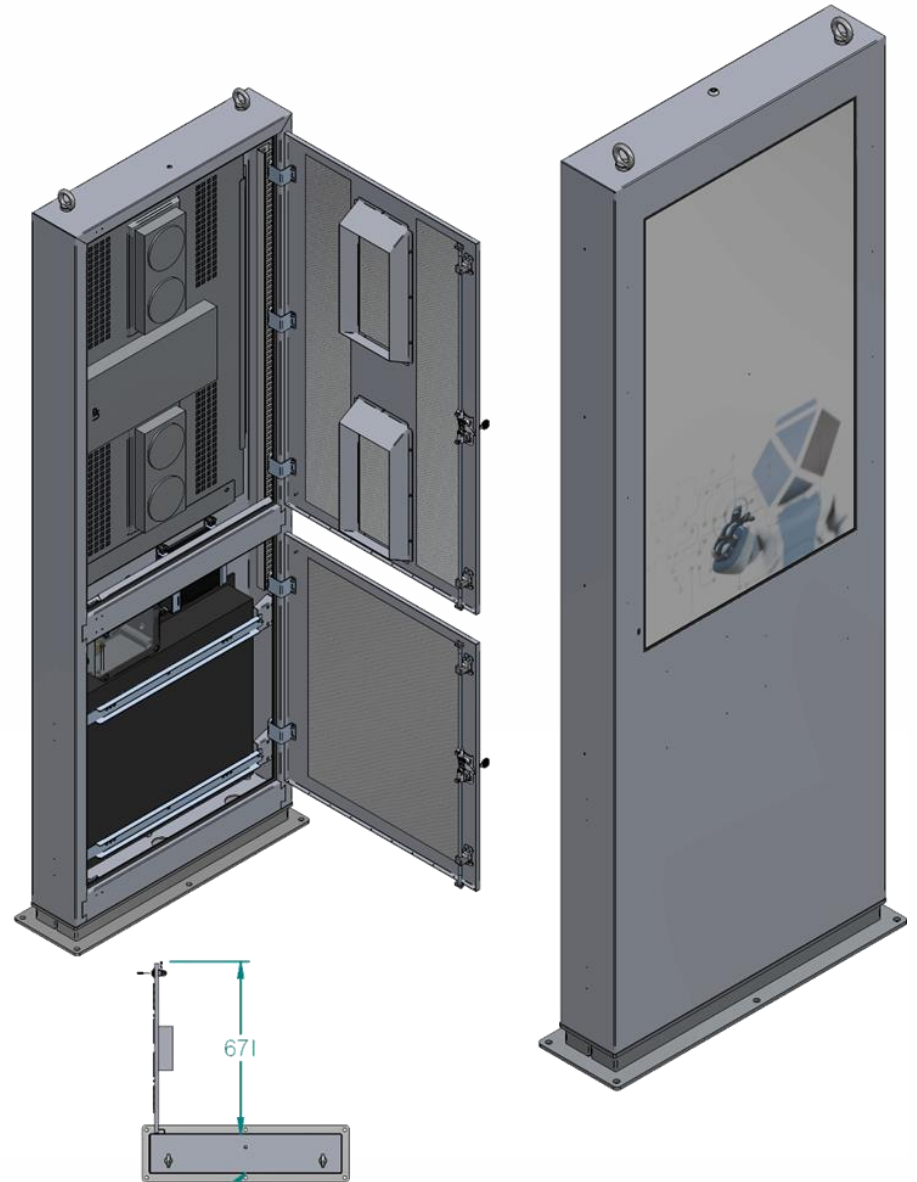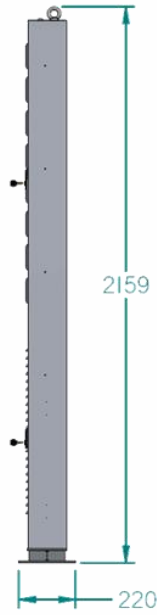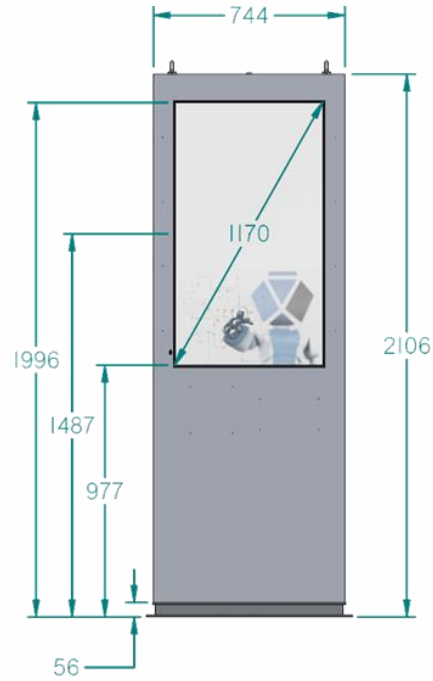

All dimensions are expressed in millimeters (mm)