


MASTER-R2 C236

Compact Server



- ✓ Ideal server for small and medium-sized businesses.
- ✓ Single sockets for Intel® Xeon® Processor E3-1200v6 or v5 Family
- ✓ Up to 64GB DDR4 ECC RAM
- ✓ Up to 6 internal HDD/SSD
- ✓ Dual Intel® Gigabit LAN
- ✓ 80 Plus Bronze certified power supply

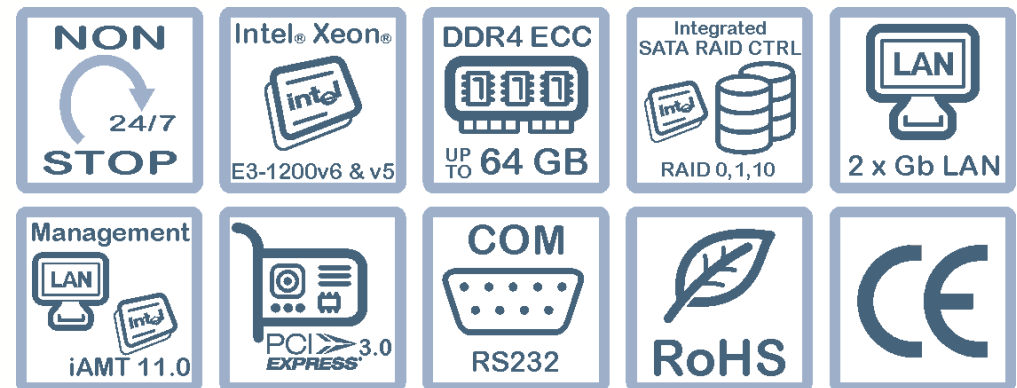

MASTER-R2 C236

Compact Server



System	Processor	Single sockets for Intel® Xeon® Processor E3-1200v6 and v5 Family
	Chipset	Intel® C236 Platform Controller Hub (PCH) chipset
	Slot di espansione	1 x PCI Express 3.0 x8 (x16 mechanical) 1 x PCI Express 3.0 x8 (x8 mechanical) 1 x PCI Express 3.0 x4 (x8 mechanical)
Memory	Max expansion.	64GB
	Type	DDR4-2133 ECC Unbuffered DIMM
	Slot	4
	Note	System equipped with 2 memory channels, each channel supports 2 ECC U-DIMM modules. For maximum performance it's recommended to use 2 or 4 memory modules. To guarantee maximum compatibility with the system, it's preferable to use identical memory modules.
Front I/O interfaces	USB	2 x USB 2.0
Rear I/O interfaces	USB	2 x USB 3.0 2 x USB 2.0 2 x USB 3.0 optional
	LAN	3 x RJ45 (2xLAN 1xBMC)
	Video	1 x VGA D-Sub 15pin 1 x Display Port (only with Intel® Xeon® with integrated graphics)
	Serial	1 x RS232 optional
Internal I/O interfaces	USB	1 x USB 2.0 type A
Storage	SATA controller	8 x SATA3 6.0 Gb/s Intel® ESRT2 RAID 0, 1, 10
	HDD/SSD bay	6 x Internal HDD/SSD SATA 2.5"/3.5"
	ODD bay	3 x External 5.25"
	Other	1 x External 3.5"
Video subsystem	Integrated video adapter	BMC integrated graphics with 2D hardware accelerator (16MB DDR3)
Network interfaces	Integrated network adapter	2 x 10/100/1000 (Intel® Ethernet Controller i210)
	Management	1 x BMC with IPMI 2.0 Optional KVM and media redirection with Intel® RMM4 key (AXRMM4LITE)

Power	Standard PSU	500W ATX ACTIVE PFC, 80Plus Bronze (85+) AC INPUT:200-240V, 4A, 50-60Hz
	Optional PSU	2 x 700W ACTIVE PFC POWER SUPPLY INPUT:100-240V , 10-5A, 60-50Hz
Chassis features	L x H x D	210mm x 462mm x 545mm
	Weight	Estimate 15Kg for medium configuration
	Internal bay	6 x 3.5"
	External bay	3 x 5.25" 1 x 3.5"
	Colour	Black
Software	Supported operating system	Microsoft Windows Server 2016
Environment	Operating temp.	From + 5°C to + 35°C
	Non operating temp.	From -20°C to +70°C
	RH	95% @ 30°C not cond.
Product certifications	Reference marks	CE, RoHS
	Directive	Built according to the European directive 2014/30/EU (EMCD), 2014/35/EU (LVD) and 2011/65/EU (RoHS)
Company certifications	Reference standards	UNI EN ISO 9001:2015
Product code (base config)	CNR897N8X40	MASTER-R2 Mono Xeon E3-1200 series, Intel C236, 2xGb Lan+SATA2 Raid, SATA3 6.0Gb



Intercomp S.p.A.
Via della Scienza 27, 37139, Verona, Italia
Tel +39 045-8378411 Fax +39 045-8510539
www.intercomp.it intercomp@intercomp.it

Scan me

The product may differ from the images shown. All registered names and trademarks are legitimate owners. All features and specifications can be changed without prior notice.
Last update 10/12/2018