


Venezia320

Digital Signage indoor kiosk



- ✓ Elegant and not bulky thanks to a very thin design
- ✓ Large portrait 32" LCD display with LED backlight
- ✓ Glove capable touchscreen, up to 4 touch point
- ✓ Solid painted steel structure
- ✓ Integrated speakers
- ✓ LAN & WiFi connectivity
- ✓ High processing capacity thanks to Intel® Core™ processors

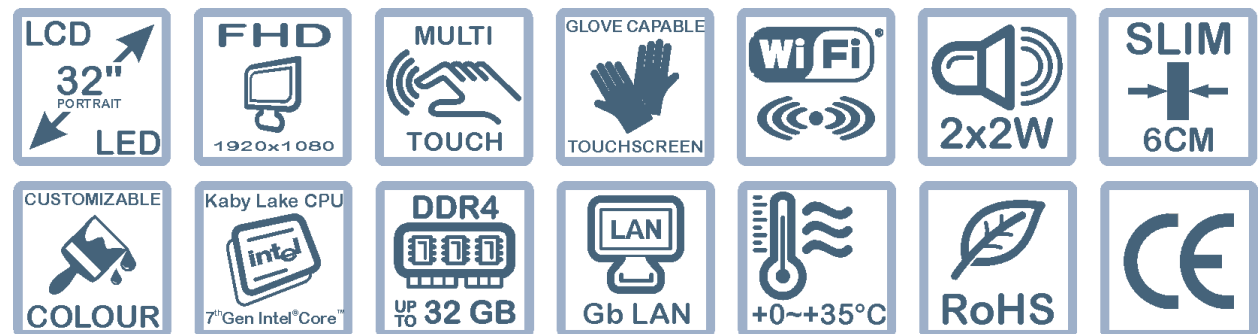

Venezia320

Digital Signage indoor kiosk



| | | | |
|--------------------------------|-----------------------------------|--|---|
| System | Processor | Socket LGA 1151 Intel® Core™ 6 th & 7 th gen. Intel® Core™ i7 / Core™ i5 Core™ i3 / Pentium | |
| | Chipset | Intel® H110 Express Chipset | |
| | Expansion slots | 1 x PCI Express 3.0 x16 low profile, half length | |
| Memoria | Max expansion | 32GB | |
| | Type | DDR4-2133 UDIMM 288pin | |
| | Size | Max size for 1 module : 4GB, 8GB, 16GB | |
| | Slot | 2 | |
| Internal I/O interface* | Note | *Some I/O interfaces are used by the internal devices | |
| | Serial | 1 x RS232 opzionale | |
| | LPT | N/A | |
| | USB | | 2 x USB 2.0 |
| | | | 2 x USB 3.0 |
| | | | 1 x USB 2.0 optional |
| | Mouse/keyboard | 1 x PS/2 | |
| | Audio | 3 x Jack 3.5mm (Line In, Line Out, Mic In) | |
| | Video | | 1 x HDMI |
| | | | 1 x DP (Display Port) |
| External I/O interface | LAN | 1 x RJ45 | |
| | USB | 2 x USB 2.0 | |
| Storage | Integrated SATA ctrl | 4 x SATA 3 6Gb/s | |
| | HDD/SSD bay | 1 x 2.5" | |
| Video subsystem | Integrated video adapter | Intel® HD Graphics Features depend on installed CPU | |
| | LCD Display | 32.0" a-Si TFT | |
| | Viewing angle | H: 170° V: 170° | |
| | Response time | 8ms | |
| | Brightness | 500 cd/m ² | |
| | Contrast | 3000:1 | |
| | Reccomended res. | 1080 x 1920 | |
| | Touchscreen | | Based on IR technology |
| | | | Up to 4 contemporary touch points |
| | Audio subsystem | Integrated audio adapter | 7.1 High Definition Audio (Codec Realtek® ALC887) |
| Speaker | | Mechanical predisposition for two integrated speakers | |
| Network interface | Integrated network adapter | 1 x 10/100/1000 Gigabit Ethernet Controller | |
| | WiFi (optional) | | 1 x Wireless High Gain N 150Mbps USB |
| | | | IEEE 802.11n, IEEE 802.11g, IEEE 802.11b |
| Power | Standard PSU | AC INPUT: 100-240V, 60-50Hz | |
| Software | Supported operating system | Microsoft Windows 7 64bit Microsoft Windows 8.1 64bit Microsoft Windows 10 64bit | |

| | | |
|-------------------------------|----------------------------|--|
| Mechanical features | Colour | Standard: Black wrinkled (RAL 9005) Optional: Different colors on request, subject to availability and minimum purchase quantity is required. |
| | L x H x D | 548mm x 1710mm x 345mm |
| | Weight | Estimated 50Kg for medium configuration |
| Environment | Operating temp | From + 5°C to + 35°C |
| | Non operating temp. | From -30°C to +70°C |
| | RH | 95% @ 30°C non cond. |
| Certifications | Reference Marks | CE, RoHS |
| | Directive | Built according to EU Directive 2014/30/EU(EMCD), 2014/35/EU(LVD) or 2014/53/UE (RED) for WiFi equipped product. & 2011/65/EU(RoHS) |
| Company certifications | Reference standards | UNI EN ISO 9001 |
| Ordering code | CNTOTEM32P-B-17-03T | Totem "Venezia320", LCD 32" Touch, H110, Black RAL9005 |
| | EKIT-17-000009 | Internal speakers kit |
| | EKIT-IND-WIFI-005 | Kit WiFi SLTP01, 802.11 b/g/n, 150 Mbps High gain |
| Optional | Doc. code | ZST-4292-00000023-00 |



www.intercomp.it

Intercomp S.p.A.
Via della Scienza 27
37139, Verona, Italia
Tel +39 045-8378411
Fax +39 045-8510539



azienda con sistema di gestione per la qualità certificato



ISO 9001:2008

intercomp@intercomp.it

The product may differ from the images shown. All names and registered trademarks are legitimate owners. All features and specifications may be changed without prior notice.
Last update 27/12/2017

Venezia320

Digital Signage indoor kiosk

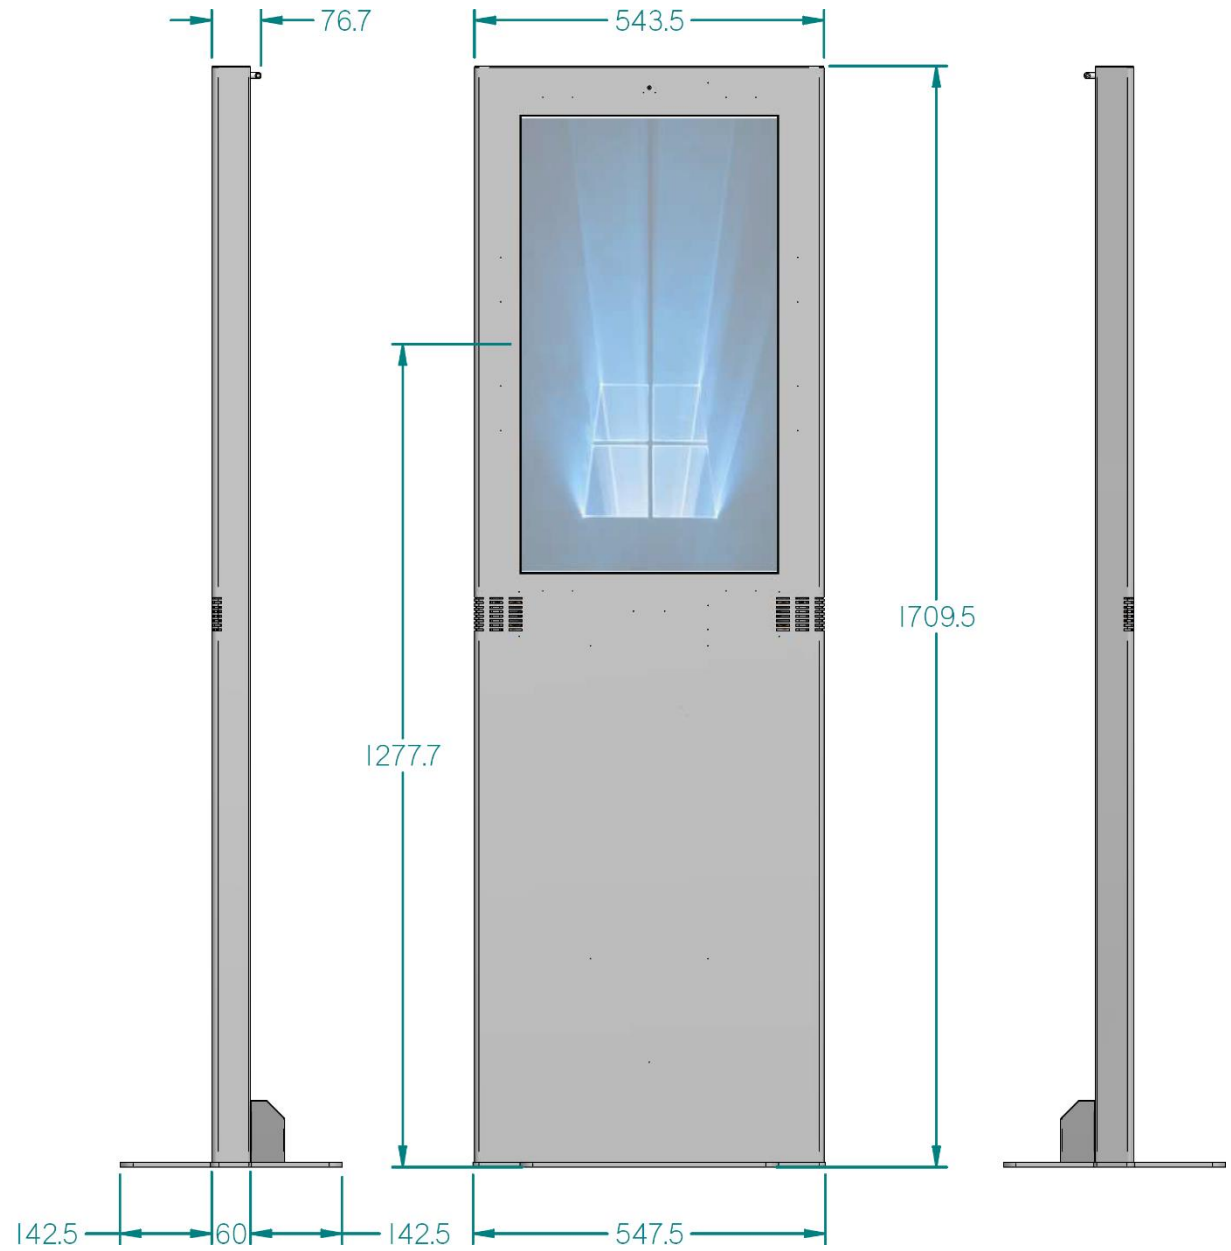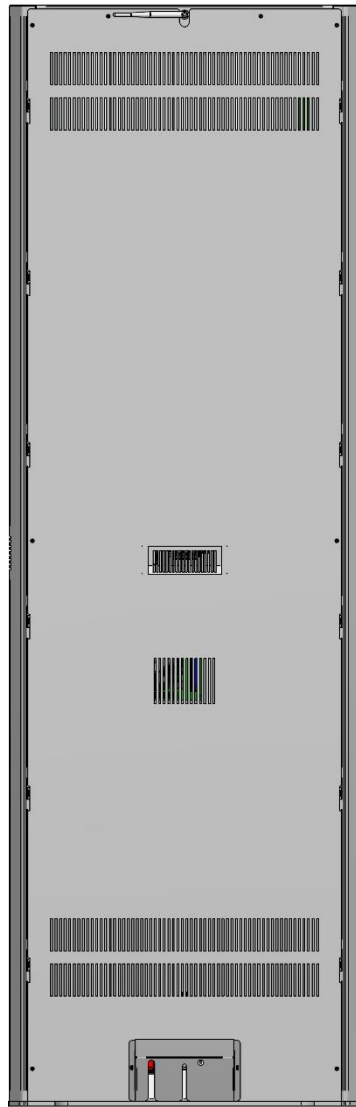

All dimensions are expressed in millimeters (mm)