




Venezia320

Digital Signage indoor kiosk



- ✓ Elegant and not bulky thanks to a very thin design
- ✓ Large portrait 32" LCD display with LED backlight
- ✓ Glove capable touchscreen, up to 4 touch point
- ✓ Solid painted steel structure
- ✓ Integrated speakers
- ✓ LAN & WiFi connectivity
- ✓ High processing capacity thanks to Intel® Core™ processors

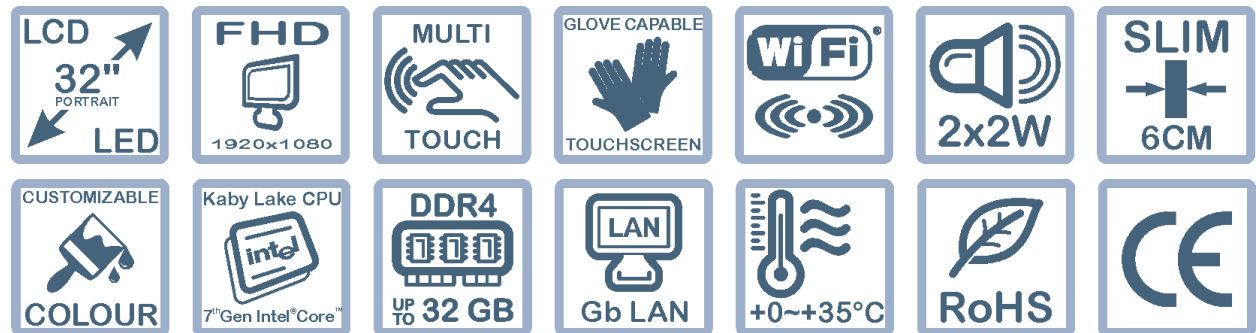

Venezia320

Digital Signage indoor kiosk



System	Processor	Socket LGA 1151 Intel® Core™ 6 th & 7 th gen. Intel® Core™ i7 / Core™ i5 Core™ i3 / Pentium	
	Chipset	Intel® H110 Express Chipset	
	Expansion slots	1 x PCI Express 3.0 x16 low profile, half length	
Memoria	Max expansion	32GB	
	Type	DDR4-2133 UDIMM 288pin	
	Size	Max size for 1 module : 4GB, 8GB, 16GB	
	Slot	2	
Internal I/O interface*	Note	*Some I/O interfaces are used by the internal devices	
	Serial	1 x RS232 opzionale	
	LPT	N/A	
	USB		2 x USB 2.0
			2 x USB 3.0
			1 x USB 2.0 optional
	Mouse/keyboard	1 x PS/2	
	Audio	3 x Jack 3.5mm (Line In, Line Out, Mic In)	
	Video		1 x HDMI
			1 x DP (Display Port)
External I/O interface	LAN	1 x RJ45	
	USB	2 x USB 2.0	
Storage	Integrated SATA ctrl	4 x SATA 3 6Gb/s	
	HDD/SSD bay	1 x 2.5"	
Video subsystem	Integrated video adapter	Intel® HD Graphics Features depend on installed CPU	
	LCD Display	32.0" a-Si TFT	
	Viewing angle	H: 170° V: 170°	
	Response time	8ms	
	Brightness	500 cd/m ²	
	Contrast	3000:1	
	Reccomended res.	1080 x 1920	
	Touchscreen	Based on IR technology Up to 4 contemporary touch points	
	Audio subsystem	Integrated audio adapter	7.1 High Definition Audio (Codec Realtek® ALC887)
		Speaker	Mechanical predisposition for two integrated speakers
Network interface	Integrated network adapter	1 x 10/100/1000 Gigabit Ethernet Controller	
	WiFi (optional)	1 x Wireless High Gain N 150Mbps USB IEEE 802.11n, IEEE 802.11g, IEEE 802.11b	
Power	Standard PSU	AC INPUT: 100-240V, 60-50Hz	
Software	Supported operating system	Microsoft Windows 7 64bit Microsoft Windows 8.1 64bit Microsoft Windows 10 64bit	

Mechanical features	Colour	Standard: White wrinkled (RAL 9010) Optional: Different colors on request, subject to availability and minimum purchase quantity is required.
	L x H x D	548mm x 1710mm x 345mm
	Weight	Estimated 50Kg for medium configuration
Environment	Operating temp	From + 5°C to + 35°C
	Non operating temp.	From -30°C to +70°C
	RH	95% @ 30°C non cond.
Certifications	Reference Marks	CE, RoHS
	Directive	Built according to EU Directive 2014/30/EU(EMCD), 2014/35/EU(LVD) or 2014/53/UE (RED) for WiFi equipped product. & 2011/65/EU(RoHS)
Company certifications	Reference standards	UNI EN ISO 9001
Ordering code	CNTOTEM32P-B-17-02T	Totem "Venezia320", LCD 32" Touch, H110, White RAL9010
	EKIT-17-000009	Internal speakers kit
	EKIT-IND-WIFI-005	Kit WiFi SLTP01, 802.11 b/g/n, 150 Mbps High gain
Optional	Doc. code	ZST-4292-00000023-00



www.intercomp.it

Intercomp S.p.A.
Via della Scienza 27
37139, Verona, Italia
Tel +39 045-8378411
Fax +39 045-8510539



azienda con sistema di gestione per la qualità certificato



ISO 9001:2008

intercomp@intercomp.it

The product may differ from the images shown. All names and registered trademarks are legitimate owners. All features and specifications may be changed without prior notice.
Last update 27/12/2017

Venezia320

Digital Signage indoor kiosk

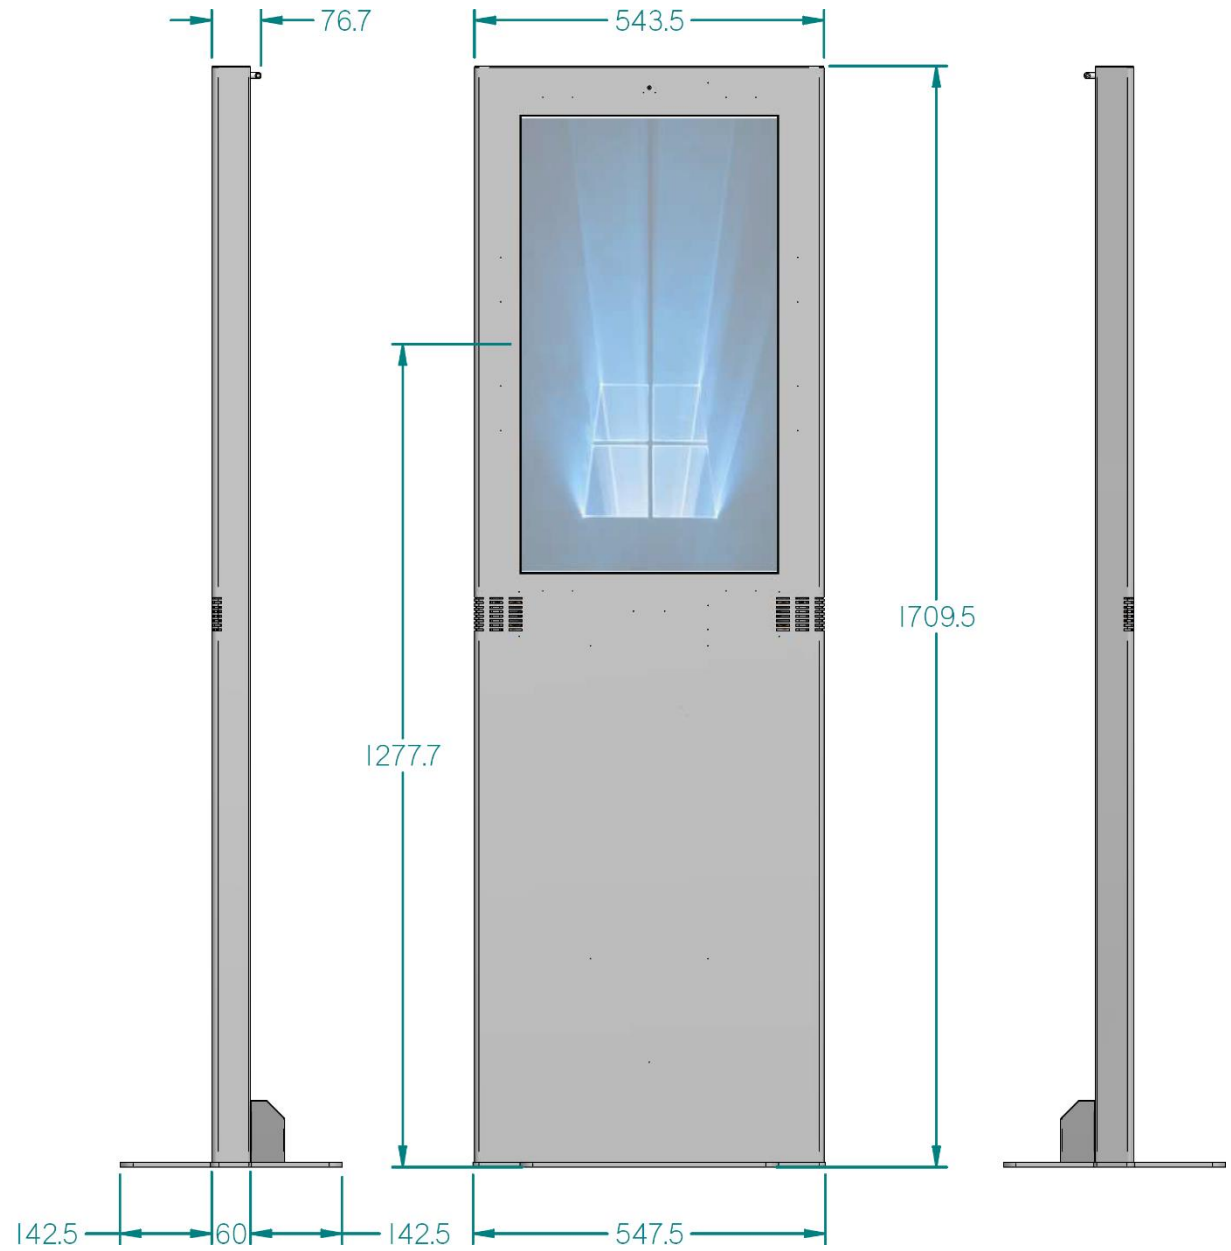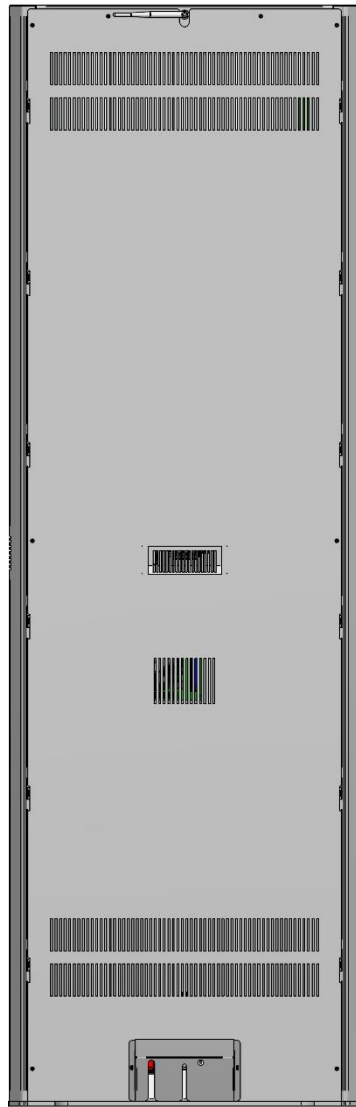

All dimensions are expressed in millimeters (mm)