




Milano320

Indoor digital signage totem



- ✓ Medium format 32" touchscreen display
- ✓ LCD panel with LED backlight
- ✓ Multitouch touchscreen
- ✓ Painted robust steel frame
- ✓ Integrated speaker
- ✓ LAN & WiFi connectivity
- ✓ High local processing capability thanks to 7th Intel® Core™



Milano320

Indoor digital signage totem



System	CPU	Socket LGA 1151 7 th & 6 th Intel® Core™ Intel® Core™ i7 / Core™ i5 Core™ i3 / Pentium
	Chipset	Intel® H110 Express Chipset
	BIOS	1 x 64MbitAMI UEFI BIOS PnP 1.0a, DMI 2.7, WfM 2.0, SM BIOS 2.7, ACPI 5.0
	Expansion slots	1 x PCI Express 3.0 x16 (Half Length) 1 x M.2 2230 (for WiFi/BT card)
	Memory	Max expansion
	Type	DDR4 2400/2133 UDIMM 288pin 4GB, 8GB, 16GB
	Slots	2
Internal I/O interfaces*	Serial	1 x RS232 optional
	USB	2 x USB 2.0 2 x USB 3.0
	Keyboard / Mouse	1 x PS/2
	Audio	3 x Jack 3.5mm (Line In, Line Out, Mic In)
	Video	1 x HDMI 1 x DP (Display Port)
External I/O interfaces*	USB	2 x USB 2.0
	LAN	1 x RJ45
Storage	Integrated storage controller	4 x SATA 3 6Gb/s
	HDD/SSD bay	1 x *HDD/SSD SATA 2.5"
	Optical drive	*Optional / Internal access only
	Note	*Check web configurator for available options
Video subsystem	Integrated video adapter	Intel® HD Graphics (Depending on the installed CPU)
	Panel	32" TFT LCD
	Aspect ratio	16:9
	Resolution	Full HD 1920 x 1080
	Pixel Pitch (Sub Pixel)	0.12(H) x 0.36(V) mm
	Contrast ratio	5000:1
	Brightness	400nit
	Response time	8ms
	Viewing angle	178° (Horizontal/Vertical)
	Touchscreen	Optional 4 contemporary touches, based on IR tech.
	Audio subsystem	Integrated audio adapter
Integrated speakers		2 x 10W

Network interface	Integrated network adapter	1 x 10/100/1000 Realtek 8111H Gigabit Fast Ethernet Controller (optional)
	WiFi & Bluetooth	1 x Wireless 802.11ac 2.4/5GHz & Bluetooth 4.2
Power	Power supply	AC INPUT: 240V, 50Hz
Mecchanical features	L x A x P	595x1860x113mm con fissaggio a pavimento* 595x1860x350mm con base di appoggio* *vedi pagina successiva
	Color / Finish	Black / Glossy
	Weight	85KG estimated for medium configuration
Environment	Operating temperature	From + 5°C to + 35°C
	Non operating temperature	From -20°C to +70°C
	RH	95% a 30°C non cond.
Product marking	Reference mark	CE, RoHS
	Directive	Built in according to European Directive 2014/30 / EU (EMCD), 2014/35 / EU (LVD) and 2011/65 / EU (RoHS)
Company Certification	Reference standards	UNI EN ISO 9001
Product code	CNTOTEM32P-A-17-01	Totem "Milano320", LCD 32", H110, TouchScreen 4 tocchi, Nero Lucido
	Doc. rev.	ZST-4292-00000003-00



www.intercomp.it

Intercomp S.p.A.
Via della Scienza 27
37139, Verona, Italia
Tel +39 045-8378411
Fax +39 045-8510539






ISO 9001:2008
intercomp@intercomp.it

The product may differ from the images shown. All registered names and trademarks are legitimate owners. All features and specifications can be changed without prior notice.
Last update 28/04/2017

Milano320

Indoor digital signage totem

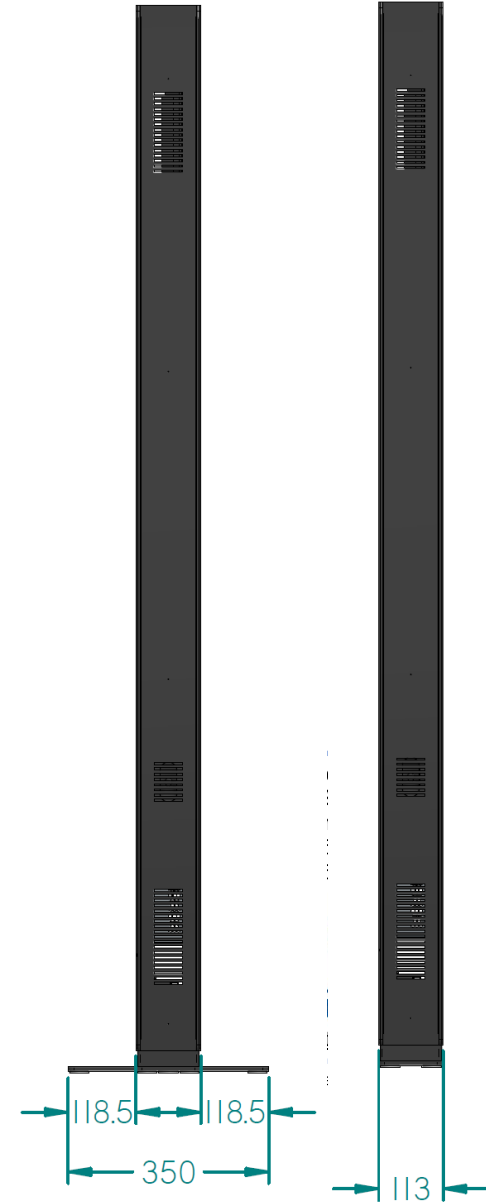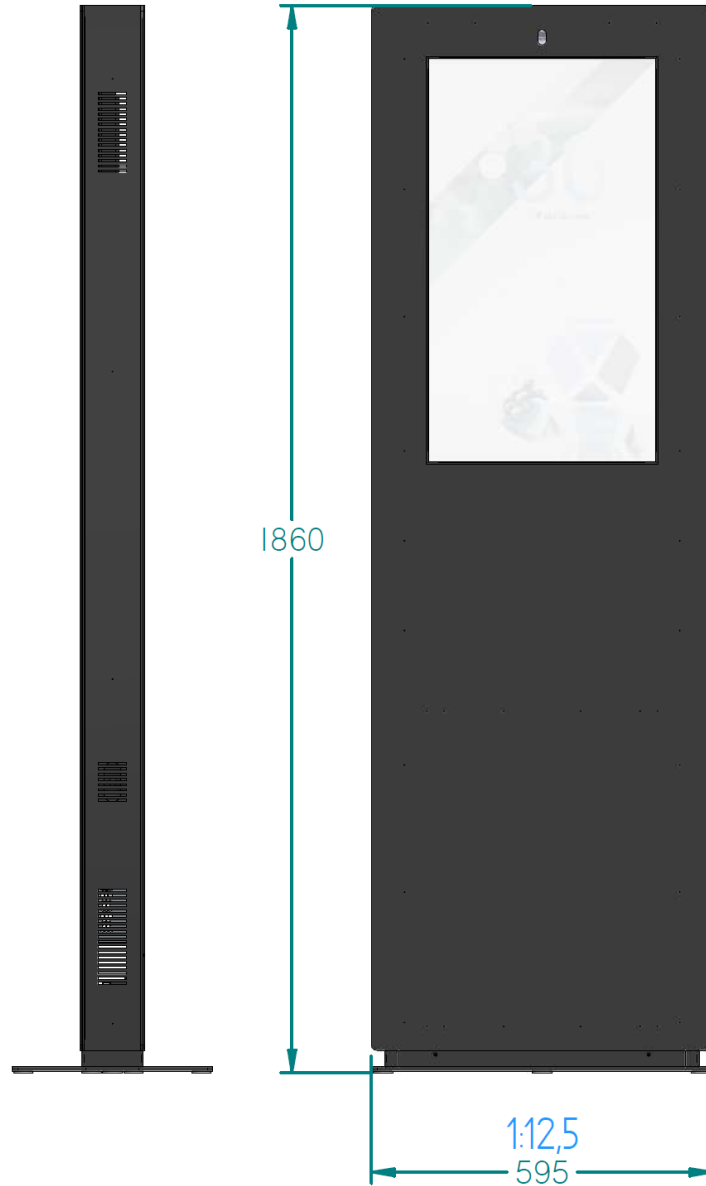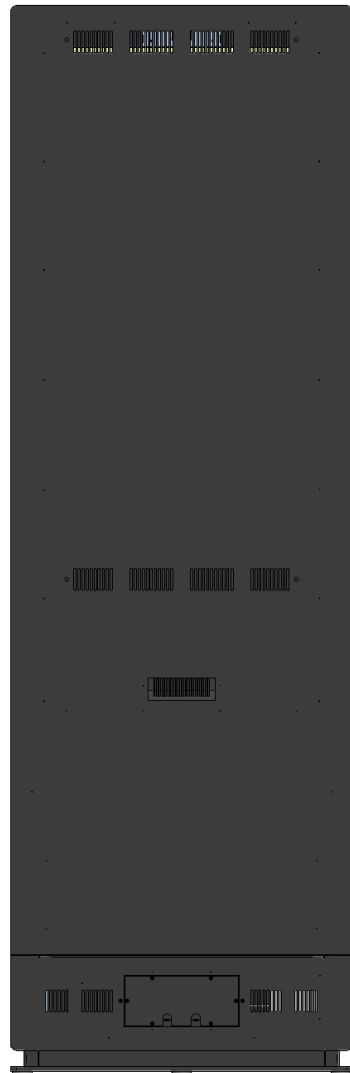

All dimensions are expressed in millimeters (mm)