


DT19 H370

Client



- ✓ Ideal in all home & office contexts.
- ✓ 8th generation Intel® Core™ processor
- ✓ Intel® HD graphics with up to 3 simultaneous displays
- ✓ Support for dedicated PCI Express 3.0 x16 video cards
- ✓ Built-in Intel® RAID 6-channel SATA Controller, up to 6Gb/s
- ✓ Ultra-Fast M.2 with PCIe Gen3 x4 & SATA interface
- ✓ Intel® Optane™ Memory Ready
- ✓ Built-in High Definition Audio 2/4/5.1/7.1-channel

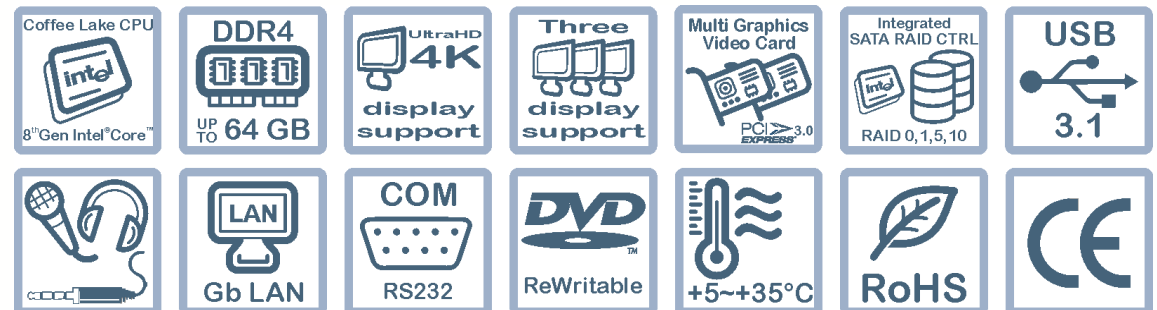

DT19 H370

Client



System	Processor	8 th Generation Intel® Core™ Processors Socket LGA 1151 Intel® Core™ i7 / i5 / i3, Pentium	
	Chipset	Intel® H370 Express Chipset	
	BIOS	2 x 128Mbit flash, AMI UEFI BIOS PnP 1.0a, DMI 2.7, WfM 2.0, SM BIOS 2.7, ACPI 5.0	
	Expansion Slots	1 x PCI Express 3.0 x16 1 x PCI Express 3.0 x4 (mechanical x16) Note. Support for AMD Quad-GPU and 2-Way CrossFireX™ 2 x PCI Express 3.0 x1	
Memory	Max Exp.	64GB	
	Type	DDR4-2666/2400/2133 UDIMM 288pin 4GB, 8GB, 16GB	
	Slot	4	
Front I/O interfaces	Audio	1 x Jack 3.5mm headphone 1 x Jack 3.5mm microphone	
	USB	2 x USB 2.0	
Back I/O interfaces	USB	2 x USB 2.0 3 x USB 3.1 Gen.1 1 x USB 3.1 Type-C™ Gen.1 2 x USB 2.0 optional 4 x USB 3.1 optional	
	Serial	1 x RS232 optional	
	LPT	1 x LPT optional	
	Keyboard /Mouse	1 x PS/2	
	Audio	6 x Jack 3.5mm	
	LAN	1 x RJ45	
	Video	1 x VGA DB15 1 x DVI-D 1 x HDMI 1 x DP (Display Port)	
	Storage	Integrated storage controller	1 x M.2 (Socket 3, M key, 2242/2260/2280/22110 SATA or PCIe x2) (M2P_16G) 1 x M.2 (Socket 3, M key, 2242/2260/2280 PCIe x4/x2) (M2Q_32G) 6 x SATA3 6Gb/s Support for RAID 0, 1, 5, 10
		Card Reader	Opzionale
		HDD/SSD bay	2 x *HDD/SSD SATA 2.5" or 3.5"
		ODD bay	1 x *5.25" (e.g. DVD +R+RW-R-RW)
Note		*Check web configurator for the base model installed and available options	
Video subsystem	Integrated graphics adapter	Intel® HD Graphics (Depends on the installed CPU) Maximum shared memory of 1 GB	
	Maximum resolution	VGA DB15 : 1920x1200@60 Hz DVI-D : 1920x1200@60 Hz DP 1.2 : 4096x2304@60 Hz HDMI 1.4 : 4096x2160@30 Hz	
	Simultaneous active displays	Up to 3	
	Dedicated graphics adapter	Check web configurator for the available options or request a custom option	

Audio subsystem	Integrated audio adapter	Intel® HD Audio (codec Realtek® ALC887)
	Channel	2 / 4 / 5.1 / 7.1 channel The HDMI 1.4 port also delivers the audio signal
Network subsystem	Integrated LAN adapter	1 x Realtek® GbE LAN chip (10/100/1000 Mbit)
	Power	Standard power supply 300W TFX ACTIVE PFC, 80Plus Bronze (85+) AC INPUT:100-240V, 5A, 60-50Hz
Mechanical features	L x H x D	333mm x 96mm x 383mm
	Weight	6 Kg for medium configuration
	Internal bay	2 x 3 1/2 unit
	External bay	1 x 5 1/4 unit 1 x 3 1/2 unit
Software	Colour	Black
	Supported operating system	Microsoft Windows 10 64bit
Environment	Operating temp.	From +5°C to +35°C
	Non operating temp.	From -20°C to +70°C
	RH	95% @ 30°C non cond.
Product certifications	Reference Marks	CE, RoHS
	Directive	Built according to EU Directive 2014/30/EU(EMCD), 2014/35/EU(LVD) and 2011/65/EU(RoHS)
Company certifications	Reference standards	UNI EN ISO 9001
Product code	CNMQA5N6IN0	DT19 Intel H370, DDR4, Gb Lan+SATA3 Raid, USB 2.0/3.0



Intercomp S.p.A.

Via della Scienza 27, 37139, Verona, Italia
Tel +39 045-8378411 Fax +39 045-8510539
www.intercomp.it intercomp@intercomp.it

The product may differ from the images shown. All registered names and trademarks are legitimate owners. All features and specifications can be changed without prior notice.
Last update 11/02/2019