


MT14 H310

Client



- ✓ Ideal in all home & office contexts.
- ✓ Up to 9th generation Intel® Core™ processor
- ✓ Intel® HD graphics with up to 2 simultaneous displays
- ✓ Support for dedicated PCI Express 3.0 x16 video cards
- ✓ Ultra-Fast M.2 with PCIe x2 & SATA interface
- ✓ Built-in High Definition Audio 2/4/5.1/7.1-channel

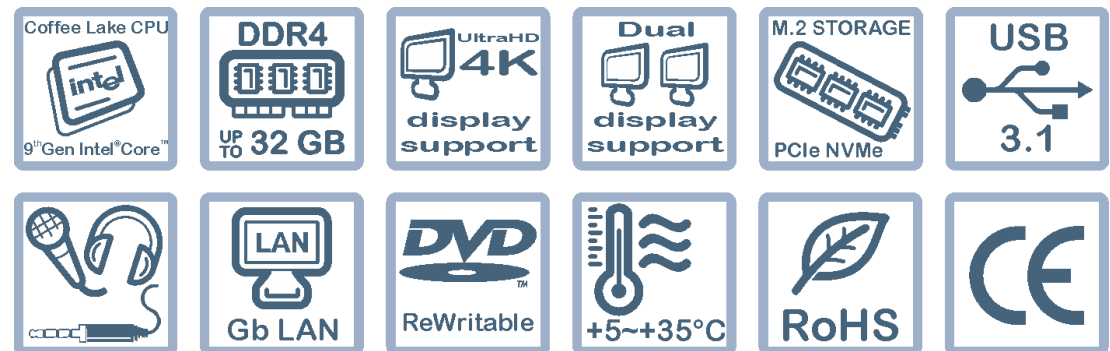

MT14 H310

Client



| | | |
|-----------------------------|-------------------------------------|--|
| System | Processor | Socket LGA 1151 Intel® Core™ from 6 th to 9 th gen. Intel® Core™ i7 / Core™ i5 / Core™ i3 / Pentium |
| | Chipset | Intel® H310 Express Chipset |
| | BIOS | 1 x 128 Mb AMI UEFI BIOS PnP 1.0a, DMI 2.7, WfM 2.0, SM BIOS 2.7, ACPI 5.0 |
| | Expansion slots | 1 x PCI Express 3.0 x16 2 x PCI Express 2.0 x1 |
| | Memory | Max exp. |
| | Type | DDR4- 2666/2400/2133 UDIMM 288pin 4GB, 8GB, 16GB |
| | Slots | 2 |
| Front I/O Interfaces | Audio | 1 x Jack 3.5mm headphone 1 x Jack 3.5mm microphone |
| | USB | 2 x USB 3.0 |
| | Back I/O interfaces | Serial |
| | LPT | N/A |
| | USB | 4 x USB 2.0 2 x USB 3.1 gen.1 2 x USB 2.0 optional |
| | Keyboard/Mouse | 2 x PS/2 |
| | Audio | 3 x Jack 3.5mm (Line In, Line Out, Mic In) |
| | LAN | 1 x RJ45 |
| | Video | 1 x VGA DB15 1 x DVI-D 1 x HDMI |
| Storage | Integrated SATA ctrl | 4 x SATA 3 6Gb/s 1 x M.2 (Socket 3, M key, 2242/2260/2280 SATA and PCIe x2 SSD) |
| | Card Reader | Optional |
| | HDD/SSD | 1 x *HDD SATA 3.5" |
| | ODD | Optional |
| | Note | * Check the installed basic model and the available options on the web configurator |
| Graphics subsystem | Integrated video interfaces | Intel® HD Graphics (depends on the CPU model) Memoria condivisa massima : 1GB |
| | Max resolution | VGA DB15 : 1920x1200@60Hz DVI-D : 1920x1200@60Hz HDMI 1.4 : 4096x2160@30Hz (HDCP 2.2 support) |
| | Contemporary active displays | Max 2 |
| | Audio subsystem | Integrated audio interfaces |
| Channel | | 2 / 4 / 5.1 / 7.1 The HDMI 1.4 port carries the audio signal |

| | | |
|-------------------------------|--------------------------------------|---|
| Network subsystem | Integrated network controller | 1 x 10/100/1000 Realtek® GbE LAN |
| | Power | Standard PSU |
| Mechanical features | L x A x P | 170mm x 365mm x 405mm |
| | Weight | 7 Kg for medium configuration |
| | Internal bay | 1 x 3" ½ unit |
| | External bay | 1 x 5" ¼ unit 1 x 3" ½ unit |
| | Colour | Black |
| Software | Supported operating system | Microsoft Windows 10 64bit |
| Environment | Operating temp. | From +5°C to + 35°C |
| | Non op. temp. | From -20°C to +70°C |
| | RH | 95% @ 30°C non cond. |
| Product certifications | Reference marks | CE, RoHS |
| | Directives | Built according to European Directive 2014/30/EU (EMCD), 2014/35/EU (LVD) and 2011/65/EU (RoHS) |
| Company | Reference standard | UNI EN ISO 9001 |
| Product code | CNMG95NAIN0 | MT14 Intel H310, DDR4, Gb Lan+SATA3, USB 2.0/3.0 |



Scan me



Intercomp S.p.A.
Via della Scienza 27, 37139, Verona, Italia
Tel +39 045-8378411 Fax +39 045-8510539
www.intercomp.it intercomp@intercomp.it



The product may differ from the images shown. All registered names and trademarks are legitimate owners. All features and specifications can be changed without prior notice.
Last update 27/03/2019