


IDAS 4000 C624

Rackmount server



- ✓ Ideal server for small and medium-sized businesses.
- ✓ Dual sockets for 1st & 2nd Gen. Intel® Xeon® Processor Scalable Family (Platinum, Gold, Silver & Bronze)
- ✓ Up to 2TB ECC Registered RAM
- ✓ Up to 8 Hot Swap HDD/SSD
- ✓ Dual Intel® 10 Gigabit LAN
- ✓ Integrated Baseboard Management Controller

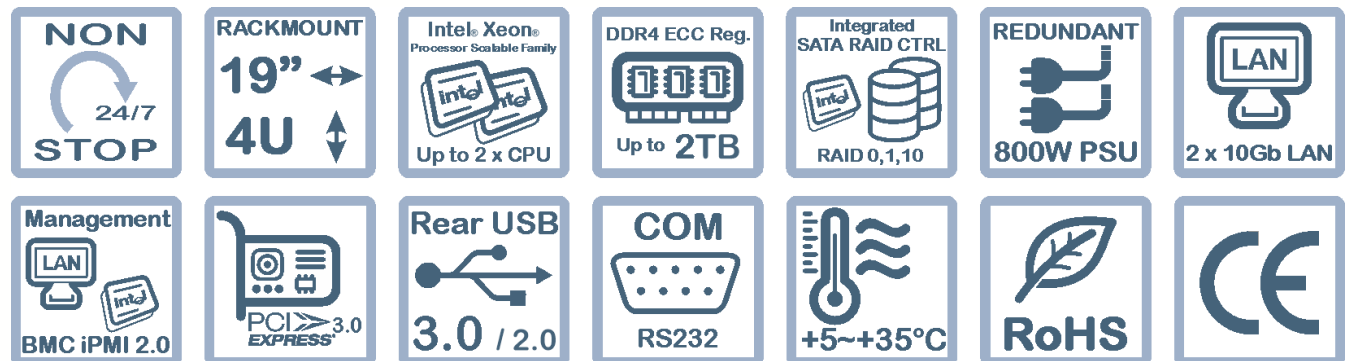

IDAS 4000 C624

Rackmount & tower server



System	Processor	Dual sockets for 1 st & 2 nd Gen. Intel® Xeon® Processor Scalable Family (Platinum, Gold, Silver & Bronze)
	Chipset	Intel® C624
	Slot di espansione	1 x PCI Express 3.0 x16 1 x PCI Express 3.0 x8 Only with second processor : 2 x PCI Express 3.0 x16 2 x PCI Express 3.0 x8
	Memory	
Memory	Max expansion.	1TB with RDIMM & 2 nd Gen. Intel® Xeon® Processor Scalable Family 2TB with LRDIMM & 2 nd Gen. Intel® Xeon® Processor Scalable Family
	Type	DDR4-2933 ECC Registered DIMM
	Slot	16
	Note	System equipped with 6 memory channels for each processor, 2 channel supports 2 ECC RDIMM modules (2-1-1 topology). For maximum performance it's recommended to use 6 memory modules per processor. To guarantee maximum compatibility with the system use the same configuration for each processor. 5 or 7 DIMM configuration for each processor are not recommended.
Front I/O interfaces	USB	2 x USB 2.0
Rear I/O interfaces	USB	2 x USB 3.0 2 x USB 2.0
	LAN	3 x RJ45
	Video	1 x VGA D-Sub 15pin
Internal I/O interfaces	USB	1 x USB 3.0 type A
	Serial	1 x 10pin RS232 (optional rear/external DB9 kit)
Storage	SATA controller	2 x SATA3 6.0 Gb/s 2 x M.2 SATA3 6.0 Gb/s / PCIe 2 x mini-SAS HD : Up to 8 x SATA3 6.0 Gb/s Intel® VROC RAID 0, 1, 10
	HDD/SSD bay	8 x External HotSwap HDD/SSD SAS/SATA 2.5"/3.5"
	ODD bay	3 x External 5.25"
	Video subsystem	Integrated video adapter
Network interfaces	Integrated network adapter	2 x 10Gb (Intel® Server Adapter X557-AT2)
	Management	1 x BMC IPMI 2.0 compliant Optional KVM and media redirection with Intel® RMM4 Lite

Power	Standard PSU	Redundant 800W ATX ACTIVE PFC AC INPUT:100-240V 50-60Hz 10A-4A
	Chassis features	
Chassis features	L x H x D	437mm x 178mm x 648mm
	Weight	Estimate 30.5Kg for medium configuration
	Internal bay	N/A
	External bay	8 x HotSwap 3.5" 3 x 5.25"
	Colour	Black
	Cooling	3 x 5000 RPM Hot-Swappable / Front 2 x 5000 RPM Hot-Swappable / Rear
	Fixing	Rack 19" with included rack guides kit
Software	Supported operating system	Microsoft Windows Server 2019
Environment	Operating temp.	From + 5°C to + 35°C
	Non operating temp.	From -20°C to +70°C
	RH	90% @ 30°C not cond.
Product certifications	Reference marks	CE, RoHS
	Directive	Built according to the European directive 2014/30/EU (EMCD), 2014/35/EU (LVD) and 2011/65/EU (RoHS)
Company certifications	Reference standards	UNI EN ISO 9001
	Product code (base)	CN1D75NCIN0 IDAS4000 Dual Xeon Gold/Silver/Bronze, Intel C624, 2xGb Lan, 8*HDD, Alim. Rid.





Intercomp S.p.A.
Via della Scienza 27, 37139, Verona, Italia
Tel +39 045-8378411 Fax +39 045-8510539
www.intercomp.it intercomp@intercomp.it

Scan me

The product may differ from the images shown. All registered names and trademarks are legitimate owners. All features and specifications can be changed without prior notice.
Last update 01/12/2020