


CORA 4100 H470

Rackmount PC



- ✓ Ideal as small load rack mount workstation.
- ✓ 10th generation Intel® Core™ processor
- ✓ Intel® HD graphics with up to 3 simultaneous displays
- ✓ Support for dedicated PCI Express 3.0 x16 video cards
- ✓ Ultra-Fast M.2 with PCIe x2 & SATA interface
- ✓ Built-in Intel® RAID 6-channel SATA Controller, up to 6Gb/s
- ✓ Intel® Optane™ Memory Ready
- ✓ Built-in High Definition Audio 2/4/5.1/7.1-channel

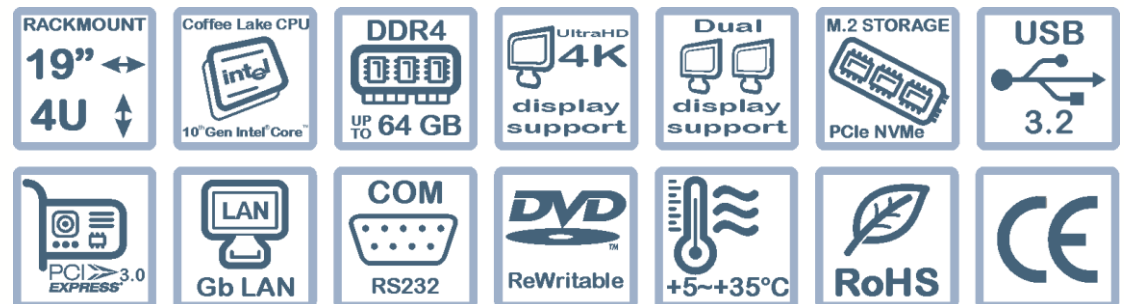

CORA 4100 H470

Rackmount PC



System	Processor	Socket LGA 1200 Intel® Core™ 10 th gen. Intel® Core™ i9 / i7 / i5 / i3 / Pentium	
	Chipset	Intel® H470 Express Chipset	
	BIOS	1 x 256 Mb AMI UEFI BIOS PnP 1.0a, DMI 2.7, WfM 2.0, SM BIOS 2.7, ACPI 5.0	
	Expansion slots	1 x PCI Express 3.0 x16 (mechanical x16) 1 x PCI Express 3.0 x4 (mechanical x16) 2 x PCI Express 3.0 x1 Supports up to ASPM L1.2 power management protocols.	
Memory	Max exp.	128GB	
	Type	DDR4- 2933/2666/2400/2133 UDIMM 288pin 4GB, 8GB, 16GB, 32GB	
	Slots	4	
Front I/O Interfaces	USB	2 x USB 3.2 gen.1 Type A	
Back I/O interfaces	Serial	1 x RS232 (optional)	
	LPT	1 x LPT (DB25) optional	
	USB		2 x USB 2.0 Type A 1 x USB 3.2 gen.1 Type C 3 x USB 3.2 gen.1 Type A 2 x USB 2.0 optional
		Keyboard/Mouse	1 x PS/2
		Audio	3 x Jack 3.5mm (Line In, Line Out, Mic In)
	LAN	1 x RJ45	
	Video		1 x VGA DB15 1 x DVI-D 1 x HDMI 1 x DP (Display Port)
		Storage	
Card Reader			Optional
Internal bay			4 x *HDD/SSD SATA 3.5" unit
External bay	3 x *ODD 5" ¼ unit		
	Note	* Check the installed basic model and the available options on the web configurator	
Graphics subsystem	Integrated video interfaces	Intel® HD Graphics (depends on the CPU model) Max shared memory : 512MB	
	Max resolution	VGA DB15 : 1920x1200@60Hz DVI-D : 1920x1200@60Hz HDMI 1.4 : 4096x2160@30Hz (HDCP 2.3 support)	
	Contemporary active displays	Max 3	

Audio subsystem	Integrated audio interfaces	Intel® HD Audio (codec Realtek® ALC887)
	Channel	2 / 4 / 5.1 / 7.1 The HDMI 1.4 port carries the audio signal
Network subsystem	Integrated network controller	1 x 10/100/1000 Intel® GbE LAN
	Power	Standard PSU 550W ATX ACTIVE PFC, 80Plus Bronze (85+) AC INPUT 200-240V,4A,50-60Hz
Mechanical features	L x H x D	483 x 178 (4U) x 505 mm.
	Weight	20 Kg for medium configuration
	Internal bay	4 x 3"½ unit
	External bay	3 x 5"¼ unit 1 x 3"½ unit
	Colour	Black
Software	Supported operating system	Microsoft Windows 10 64bit
Environment	Operating temp.	From +5°C to + 35°C
	Non op. temp.	From -20°C to +70°C
	RH	95% @ 30°C non cond.
Product certifications	Reference marks	CE, RoHS
	Directives	Built in compliance with the European directive 2014/30/EU(EMCD), 2014/35/EU(LVD) and RoHS III
Company	Reference standard	UNI EN ISO 9001
Product code	CNC9ADNEINO	CORA4100 Intel H470, Gb Lan+SATA3 Raid, USB 2.0/3.0
	Doc ref.	ZST-4292-00000104-00



Scan me



Intercomp S.p.A.
Via della Scienza 27, 37139, Verona, Italia
Tel +39 045-8378411 Fax +39 045-8510539
www.intercomp.it intercomp@intercomp.it



The product may differ from the images shown. All registered names and trademarks are legitimate owners. All features and specifications can be changed without prior notice.
Last update 02/03/2021