


# CORA 2000 H410

Rackmount PC



- ✓ Computer in 2U rack format.
- ✓ 10<sup>th</sup> generation Intel® Core™ processor
- ✓ Intel® HD graphics with up to 2 simultaneous displays
- ✓ Support for dedicated LowProfile PCI Express 3.0 x16 video cards
- ✓ Ultra-Fast M.2 with PCIe x2 & SATA interface
- ✓ Built-in High Definition Audio 2/4/5.1/7.1-channel

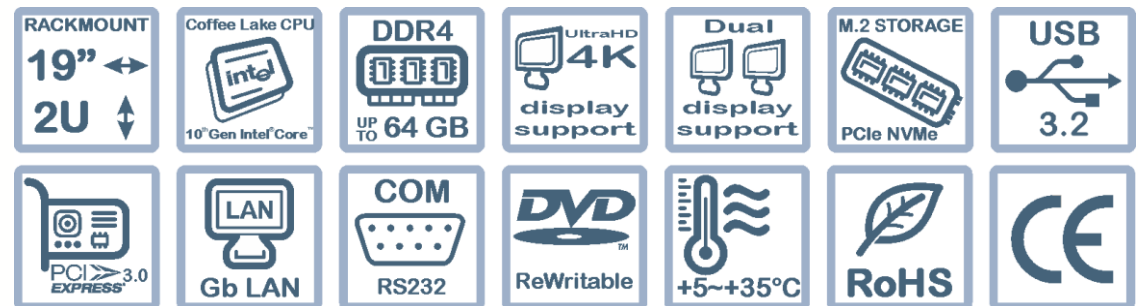

# CORA 2000 H410

Rackmount PC



<b>System</b>	<b>Processor</b>	Socket LGA 1200 Intel® Core™ 10 <sup>th</sup> gen. Intel® Core™ i9 / i7 / i5 / i3 / Pentium	
	<b>Chipset</b>	Intel® H410 Express Chipset	
	<b>BIOS</b>	1 x 128 Mb AMI UEFI BIOS PnP 1.0a, DMI 2.7, WfM 2.0, SM BIOS 2.7, ACPI 5.0	
	<b>Expansion slots</b>	1 x PCI Express 3.0 x16 2 x PCI Express 2.0 x1 Supports up to ASPM L1.2 power management protocols.	
	<b>Memory</b>		
	<b>Max exp.</b>	64GB	
	<b>Type</b>	DDR4- 2933/2666/2400/2133 UDIMM 288pin 4GB, 8GB, 16GB, 32GB	
	<b>Slots</b>	2	
<b>Front I/O Interfaces</b>	<b>USB</b>	2 x USB 2.0	
<b>Back I/O interfaces</b>	<b>Serial</b>	1 x RS232 (optional)	
	<b>LPT</b>	N/A	
	<b>USB</b>		4 x USB 2.0
			2 x USB 3.2 gen.1
			2 x USB 3.2 gen.1 optional
	<b>Keyboard/Mouse</b>	2 x PS/2	
	<b>Audio</b>	3 x Jack 3.5mm (Line In, Line Out, Mic In)	
	<b>LAN</b>	1 x RJ45	
	<b>Video</b>		1 x VGA DB15
			1 x DVI-D
		1 x HDMI	
<b>Storage</b>	<b>Integrated SATA ctrl</b>	4 x SATA 3 6Gb/s 1 x M.2 (Socket 3, M key, 2242/2260/2280 SATA and PCIe x2 SSD)	
	<b>Card Reader</b>	Optional	
	<b>HDD/SSD bay</b>	2 x *HDD/SSD SATA 2.5" or 3.5"	
	<b>ODD bay</b>	1 x *DVD +R+RW-R-RW	
	<b>Note</b>	*Check web configurator for the base model installed and available options	
<b>Graphics subsystem</b>	<b>Integrated video interfaces</b>	Intel® HD Graphics (depends on the CPU model) Max shared memory : 512MB VGA DB15 : 1920x1200@60Hz DVI-D : 1920x1200@60Hz HDMI 1.4 : 4096x2160@30Hz (HDCP 2.3 support)	
	<b>Max resolution</b>		
	<b>Contemporary active displays</b>	Max 2	
	<b>Audio subsystem</b>		
	<b>Integrated audio interfaces</b>	Intel® HD Audio (codec Realtek® ALC887)	
	<b>Channel</b>	2 / 4 / 5.1 / 7.1 The HDMI 1.4 port carries the audio signal	

<b>Network subsystem</b>	<b>Integrated network controller</b>	1 x 10/100/1000 Realtek® GbE LAN
	<b>Power</b>	
	<b>Standard PSU</b>	350W ATX ACTIVE PFC AC INPUT:100-240V, 8.5-5.5A, 50-60Hz W/OUTLET:100-240V,3A
<b>Mechanical features</b>	<b>L x A x P</b>	483mm x 89mm (2U) x 576mm
	<b>Weight</b>	15 Kg for medium configuration
	<b>Internal bay</b>	2 x 3" ½ unit or 2" ½ unit
	<b>External bay</b>	1 x 5" ¼ unit 1 x 3" ½ unit
	<b>Colour</b>	Black
<b>Software</b>	<b>Supported operating system</b>	Microsoft Windows 10 64bit
<b>Environment</b>	<b>Operating temp.</b>	From +5°C to + 35°C
	<b>Non op. temp.</b>	From -20°C to +70°C
	<b>RH</b>	95% @ 30°C non cond.
<b>Product certifications</b>	<b>Reference marks</b>	CE, RoHS
	<b>Directives</b>	Built according to European Directive 2014/30/EU (EMCD), 2014/35/EU (LVD) and 2011/65/EU (RoHS)
<b>Company</b>	<b>Reference standard</b>	UNI EN ISO 9001
<b>Product code</b>	<b>CN18AENDINO</b>	CORA 2000 Intel H410, Gb Lan+SATA3, USB 2.0/3.0
	<b>Doc ref.</b>	ZST-4292-00000087-00



Scan me





**Intercomp S.p.A.**  
Via della Scienza 27, 37139, Verona, Italia  
Tel +39 045-8378411 Fax +39 045-8510539  
www.intercomp.it intercomp@intercomp.it

The product may differ from the images shown. All registered names and trademarks are legitimate owners. All features and specifications can be changed without prior notice.  
Last update 14/12/2020