


IDAS 2000 C624

Rackmount server



- ✓ Ideal server for small and medium-sized businesses.
- ✓ Dual sockets for 1st & 2nd Gen. Intel® Xeon® Processor Scalable Family (Platinum, Gold, Silver & Bronze)
- ✓ Up to 2TB ECC Registered RAM
- ✓ Up to 8 Hot Swap HDD/SSD
- ✓ Dual Intel® 10 Gigabit LAN
- ✓ Integrated Baseboard Management Controller

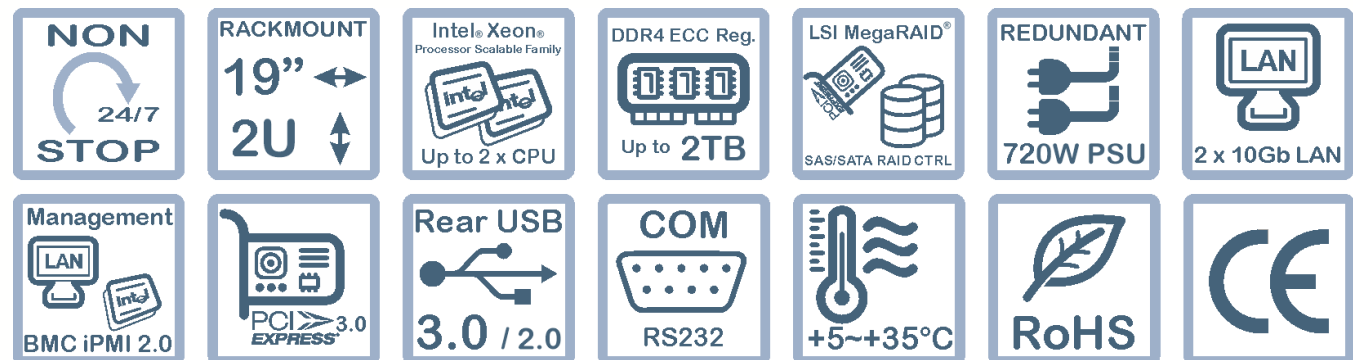

IDAS 2000 C624

Rackmount & tower server



System	Processor	Dual sockets for 1 st & 2 nd Gen. Intel® Xeon® Processor Scalable Family (Platinum, Gold, Silver & Bronze)
	Chipset	Intel® C624
	Slot di espansione (low profile)	1 x PCI Express 3.0 x16* 1 x PCI Express 3.0 x8* Only with second processor : 2 x PCI Express 3.0 x16 2 x PCI Express 3.0 x8
	Note	*One used for SAS RAID controller
Memory	Max expansion.	1TB with RDIMM & 2 nd Gen. Intel® Xeon® Processor Scalable Family 2TB with LRDIMM & 2 nd Gen. Intel® Xeon® Processor Scalable Family
	Type	DDR4-2933 ECC Registered DIMM
	Slot	16
	Note	System equipped with 6 memory channels for each processor, 2 channel supports 2 ECC RDIMM modules (2-1-1 topology). For maximum performance it's recommended to use 6 memory modules per processor. To guarantee maximum compatibility with the system use the same configuration for each processor. 5 or 7 DIMM configuration for each processor are not recommended.
Rear I/O interfaces	USB	2 x USB 3.0 2 x USB 2.0
	LAN	3 x RJ45
	Video	1 x VGA D-Sub 15pin
Internal I/O interfaces	USB	1 x USB 3.0 type A
	Serial	1 x 10pin RS232 (optional rear/external DB9 kit)
Storage	SATA controller	2 x SATA3 6.0 Gb/s 2 x M.2 SATA3 6.0 Gb/s / PCIe 2 x mini-SAS HD : Up to 8 x SATA3 6.0 Gb/s Intel® VROC RAID 0, 1, 10
	PCIe SAS controller	LSI MegaRAID® SAS 9361-4i 12Gb/s SAS/SATA RAID 0, 1, 5, 10, 50, JBOD 4 Port SAS/SATA (optional 8port) 1GB 1866MHz DDRIII SDRAM Optional: CacheVault Flash Cache Protection Module
	HDD/SSD bay	8 x External HotSwap HDD/SSD SAS/SATA 2.5"/3.5"
	ODD bay	1 x External Slim 5.25"
Video subsystem	Integrated video adapter	Integrated Graphics Core with 2D Hardware accelerator (16MB DDR4)
Network interfaces	Integrated network adapter	2 x 10Gb (Intel® Server Adapter X557-AT2)
	Management	1 x BMC IPMI 2.0 compliant Optional KVM and media redirection with Intel® RMM4 Lite

Power	Standard PSU	Redundant 720W ATX ACTIVE PFC, 80Plus Gold AC INPUT:100-240V 50-60Hz 9A-4A
	Chassis features	L x H x D Weight Internal bay External bay Colour Fixing
Software	Supported operating system	Microsoft Windows Server 2019
	Environment	Operating temp. Non operating temp. RH
Product certifications	Reference marks	CE, RoHS
	Directive	Built according to the European directive 2014/30/EU (EMCD), 2014/35/EU (LVD) and 2011/65/EU (RoHS)
Company certifications	Reference standards	UNI EN ISO 9001
Product code (base)	CN26A4NCIN0	IDAS2000 Dual Xeon Gold/Silver/Bronze, Intel C624, 2xGb Lan, 8*HDD, Alim. Rid.

Doc ref. ZST-4292-00000136-00





Intercomp S.p.A.
Via della Scienza 27, 37139, Verona, Italia
Tel +39 045-8378411 Fax +39 045-8510539
www.intercomp.it intercomp@intercomp.it

Scan me

The product may differ from the images shown. All registered names and trademarks are legitimate owners. All features and specifications can be changed without prior notice.
Last update 18/10/2021